

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu

Cantilever sliding gate, wicket and fence fields with welded mesh panel filling from galvanized steel (Product RKS-T-ISCHTOR-1-S)

Self-supporting sliding gate with welded mesh infill from galvanized steel, powder painted.


Although sliding gate RKS T-ISCHTOR-1-S is an industrial gate, but also suitable for private use.

This system is available in various sizes and RAL colors as well as galvanized. On request can be equipped with an electric drive.

Standard gates for 3-9 m driveway in 4 standard heights (1250/1500/1750/2000 mm).

Example project



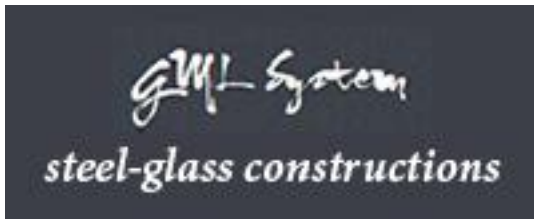

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu

Technical Details:

1. gate type: cantilever sliding gate, self-supporting,
2. opening width: 5000mm,
3. height: 1500mm,
4. filling: welded steel wire mesh,
5. gate construction: welded frame and ground track from rectangular tube,
6. material and color: galvanized steel, powder painted, any color from the RAL color palette,
7. posts: double guiding frame and single receiver post from square tube on footplate,
8. accessories: roller carriages, flashing beacon

Optional on request:

1. automation with electrical drive with remote control, Beninca BULL,
2. for an extra charge, a direct connection to our fence system RKS T-PZAUNFD-1-S

Production time 4-6 weeks

Welded construction. Pre-assembly of the whole construction takes place in workshop.