


Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000

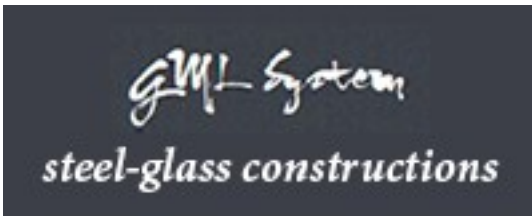

info@gmlsystem.pl



www.gmlsystem.eu



Cantilever sliding gate from galvanized steel with filling from wood-plastic composites (WPCs) (Product RKS-T-ISCHTOR-11-W)

Self-supporting sliding gate from galvanized and powder painted steel with filling from wood-plastic composites (WPCs).

Example project





GML System
steel-glass constructions

+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu




Technical Details:

1. gate type: cantilever sliding gate, self-supporting,
2. opening width: 5500mm,
3. height: 1500mm,
4. filling: wood-plastic composites (WPCs),
5. gate construction: welded frame from square tube profiles 60x60mm with welded infill bars screwed to ground track 120x100x5mm,
6. material and color: galvanized steel, powder painted, any color from the RAL color palette,
7. posts: double guiding and double receiver posts from square tube on footplate,
8. accessories: 2 high-quality roller carriages, 1 hook lock,
9. optional on request: automation: electrical drive equipped with remote control, Beninca BULL.

Production time 4-6 weeks

Welded construction. Pre-assembly of the whole construction takes place in workshop.

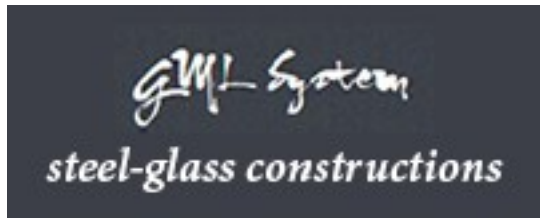

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu