



Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl




www.gmlsystem.eu


Cantilever sliding gate with bars infill from aluminium (Product RKS-T-ISCHTOR-2-A)

Self-supporting sliding gate with horizontal bar infill from powder painted aluminium.

Standard gates for 4-10 m driveway, height up to 2.4 m.

Example project:

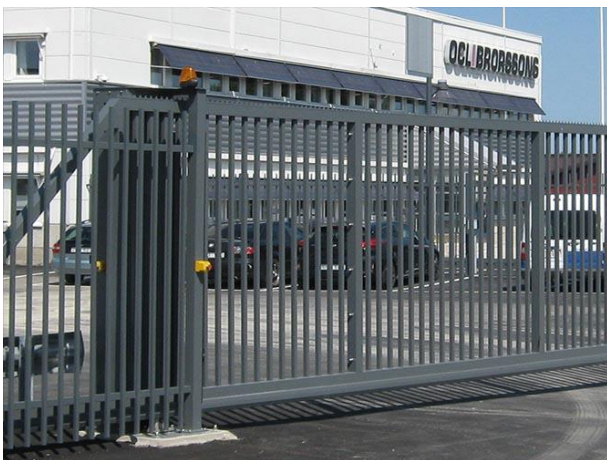

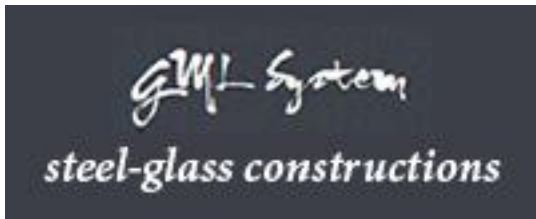

Limanowskiego 6/21, 30-534 Krakow




+48 515 322608, +48 606 363000



info@gmlsystem.pl




www.gmlsystem.eu

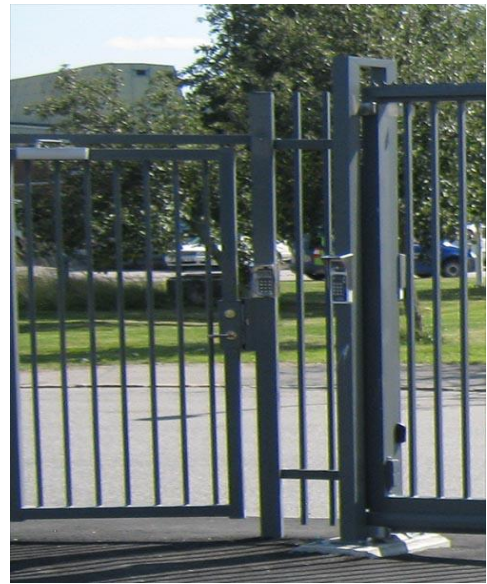

Technical Details:

1. gate type: cantilever sliding gate, self-supporting,
2. opening width: 6000mm,
3. height: 2000mm,
4. filling: horizontal bars from square tube 25/25 with distance between them of about 100mm,

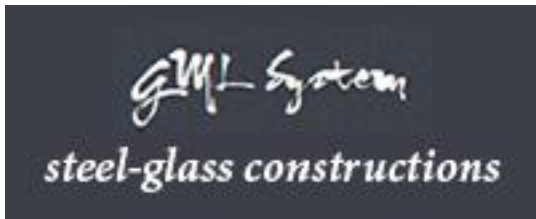

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu

5. gate construction: welded frame, filling profiles and ground track 120x100x5mm,
6. material and color: aluminium, powder painted, any color from the RAL color palette,
7. posts: double receiver post from square tube on footplate,
8. accessories: 2 high-quality roller carriages, flashing beacon,
9. automation: power-operated gate with a drive located in a post, closed with a cover, Beninca BULL

Production time 4-6 weeks

Welded construction. Pre-assembly of the whole construction takes place in workshop.