

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu


Self-supporting sliding gate and fence fields with welded mesh filling from galvanized steel (Product RKS-T-ISCHTOR-3-S)

Standard gates for 3-6 m driveway, 1.5 to 2.4 m height.

Roller carriages built into ground track.

Example project



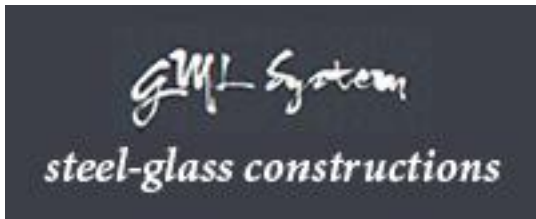

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu

Technical Details:

1. gate type: cantilever sliding gate, self-supporting,
2. opening width: 6000mm,
3. height: 1500mm,
4. filling: welded steel wire mesh,
5. gate construction: welded frame from rectangular tube, ground track,
6. material and color: galvanized steel, powder painted, any color from the RAL color palette,
7. posts: double guiding frame from square tube on footplate,
8. accessories: roller carriages
9. optional, automation: electrical drive equipped with remote control, Beninca BULL

Production time 4-6 weeks

Welded construction. Pre-assembly of the whole construction takes place in workshop.