

Limanowskiego 6/21, 30-534 Krakow



+48 515 322608, +48 606 363000



info@gmlsystem.pl



www.gmlsystem.eu


Cantilever sliding gate with palisade infill from galvanized steel (Product RKS-T-ISCHTOR-7-S)

Self-supporting sliding gate with palisade filling from galvanized steel, powder painted.

Standard gates for 4-10 m driveway, 1.5 to 2.4 m height.

Roller carriages built into ground track.

Example project

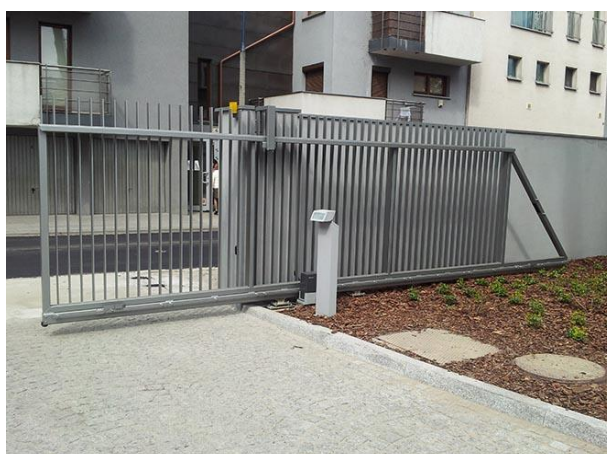



Technical Details:

1. gate type: cantilever sliding gate, self-supporting,
2. opening width: 5500mm,
3. height: 2000mm,
4. filling: palisade from steel profiles 60x10mm,
5. gate construction: welded frame from profiles 80x80mm with welded filling profiles and ground track 120x100x5mm,
6. material and color: galvanized steel, powder painted, any color from the RAL color palette,
7. posts: single receiver post from square tube profile 80x80mm on footplate, upper guide bracket fixed to a fence wall,
8. accessories: 2 high-quality roller carriages with 12 rolls each, 1 hook lock, Locinox against surcharge, flashing beacon,
9. automation: electrical drive equipped with remote control, Beninca BULL 8

Production time 4-6 weeks

Welded construction. Pre-assembly of the whole construction takes place in workshop.